


94 FRAME

PMDC/BLDC GEAR MOTOR

General information

- Encoder Available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating Temperature $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$.
- UL Certified.
- With protective vent valve to reduce condensation.

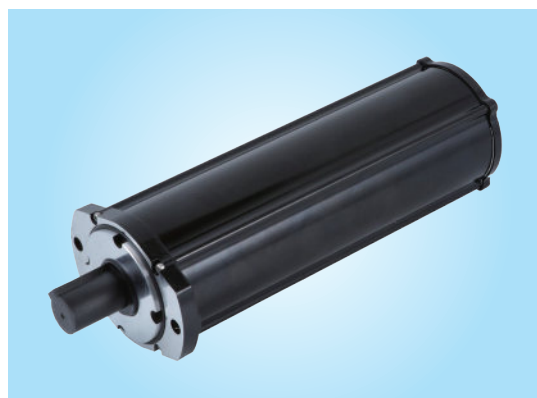

Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME076ZT101-PL0745	24	1	2	6.25	1.3	320	745	4	43	308
MB/ME076ZT102-PL0745	24	1	2.3	7	1.7	320	745	4	57	308
MB/ME076ZT104-PL0745	24	1	3	7	2.2	500	745	4	115	308
MB/ME076ZT103-PL2023	24	1	0.84	6	0.6	550	2023.5	5	34	330

Mechanical

