


128 FRAME

PMDC/BLDC GEAR MOTOR

General information

- Encoder available : 2 PPR or 4 PPR.
- Epoxy coating on the surface.
- Protection class IP 65.
- Operating temperature $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$.
- With protective vent valve to reduce condensation.

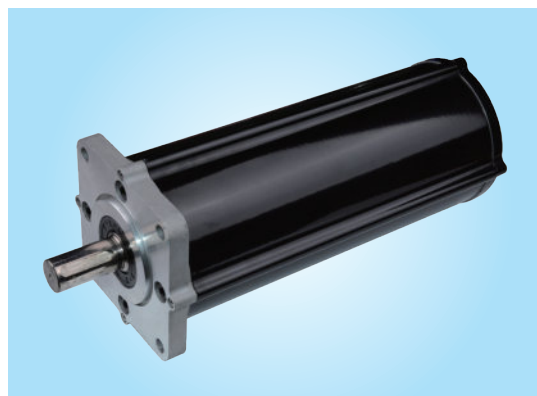

Specification

Model	Voltage (v)	No Load		Rated Load		Torque (N.m)	Ratio	Stage	Power (W)	Length (mm)
		Current (A)	Speed (rpm)	Current (A)	Speed (rpm)					
MB/ME120FG100-PL0023	24	5.39	105	21.82	87	37.3	23	2	339	310
MB/ME120FG100-PL0036	24	5.39	67	21.82	56	58.3	36			
MB/ME120FG100-PL0049	24	5.39	49	21.82	41	79.4	49			
MB/ME120FG100-PL0141	24	5.98	17	21.82	14	205.9	141	3	306	330
MB/ME120FG100-PL0216	24	5.98	11	21.82	9	315.4	216			
MB/ME120FG100-PL0398	24	5.98	6	21.82	5	581.1	398			
MB/ME120FG100-PL0845	24	6.71	3	21.82	2	1098.5	845	4	272	355
MB/ME120FG100-PL1557	24	6.71	2	21.82	1	2024.1	1557			

Mechanical

