

MB039BF

直流减速电机


- 产品应用 (Product Application)
 - 收割机 (Harvester)



● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位 (Unit)	MB039BF
工作电压 (Voltage)	VDC	12
空载转速 (No-Load Speed)	RPM	85
空载电流 (No-Load Current)	A	1
额定转速 (Rated Speed)	RPM	55
额定电流 (Rated Current)	A	5
额定扭矩 (Rated Torque)	Nm	3
堵转扭矩 (Stall Torque)	Nm	>8
减速比 (Ratio)		70

● 外形图 (Outside Drawing)

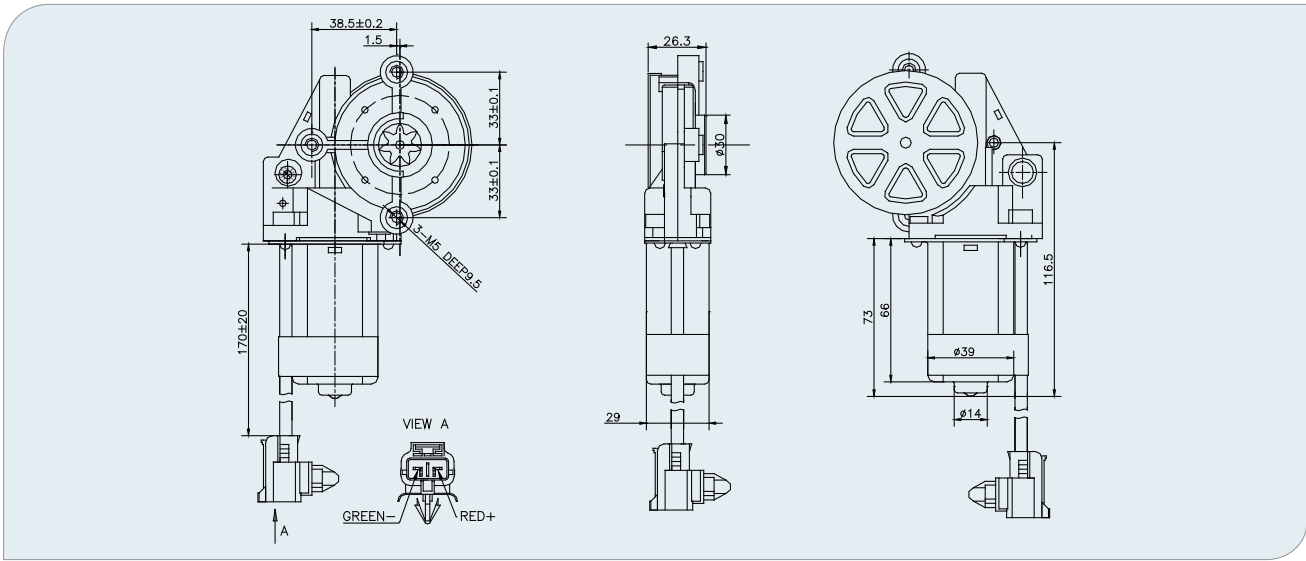

MB061FF

直流减速电机

● 产品应用 (Product Application)


➤ 收割机 (Harvester)



● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位 (Unit)	MB061FF
额定电压 (Rated Voltage)	VDC	12
空载转速 (No-Load Speed)	RPM	72
空载电流 (No-Load Current)	A	1
额定转速 (Rated Speed)	RPM	65
额定电流 (Rated Current)	A	7.5
额定扭矩 (Rated Torque)	Nm	5.88
堵转扭矩 (Stall Torque)	Nm	≥28
减速比 (Ratio)		69

● 外形图 (Outside Drawing)

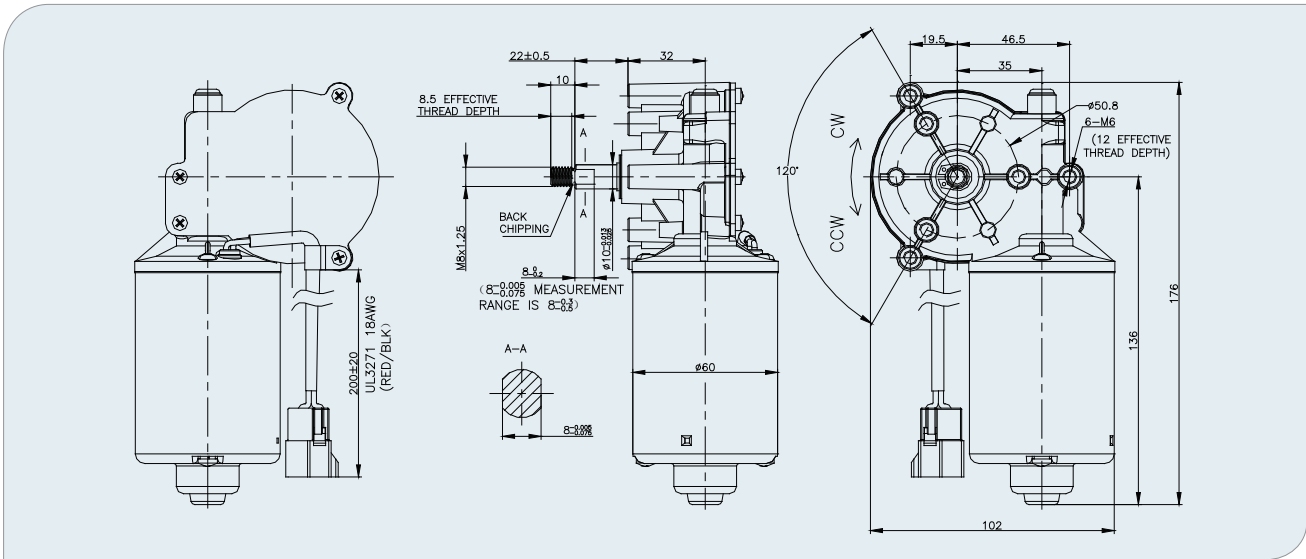

MB076FG

直流减速电机


- 产品应用 (Product Application)
 - 收割机 (Harvester)



● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位 (Unit)	MB076FG
额定电压 (Rated Voltage)	VDC	12
额定功率 (Rated Power)	W	95
额定转速 (Rated Speed)	RPM	15±2
额定力矩 (Rated Moment)	Nm	60
额定电流 (Rated Current)	A	≤20

● 外形图 (Outside Drawing)

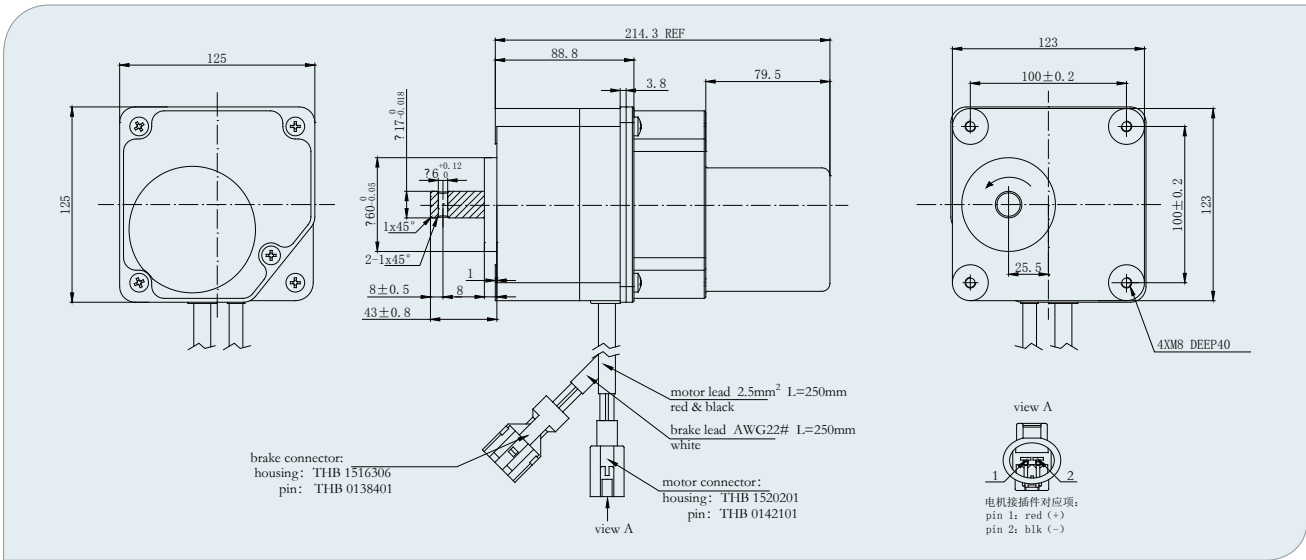

直流电机

► 播种机 (Planter)


▶ 割草机(Field Mower)



● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位(Unit)	MB100FG
额定电压 (Rated Voltage)	VDC	12
额定转矩 (Rated Torque)	mNm	400
额定转速 ((Rated Speed)	RPM	2600
额定电流 (Rated Current)	A	14
额定功率 (Rated Power)	W	110
空载转速 (No-Load Speed)	RPM	3200
空载电流 (No-Load Current)	A	3

● 外形图 (Outside Drawing)

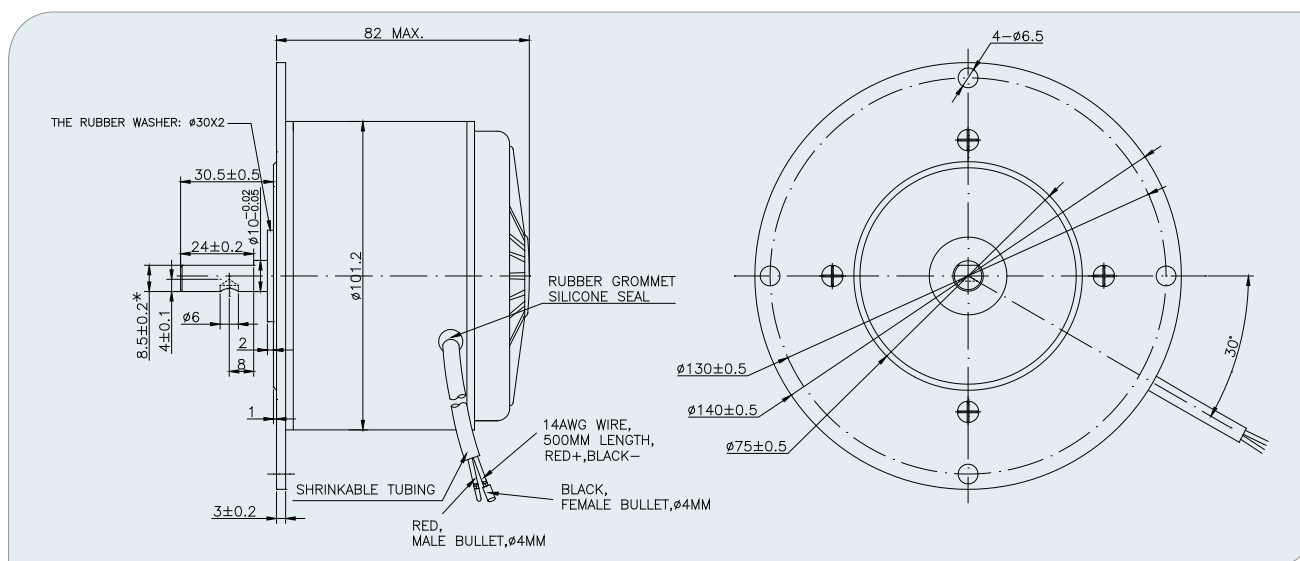

MB090FG

蜗 轮 蜗 杆 减 速 电 机

● 产品应用 (Product Application)


- ▶ 撒肥机, 播种机, 育(抛)秧机等
(Fertilizer Spreader, Planter,
Seedling Machine etc.)



- 性能参数 (Performance Parameter)

规格参数 (Specification)	单位(Unit)	MB090FG
工作电压 (Voltage)	VDC	12
功率 (Power)	W	200
空载转速 (No-Load Speed)	RPM	70
空载电流 (No-Load Current)	A	<2.5
额定转速 (Rated Speed)	RPM	60
额定电流 (Rated Current)	A	23
额定扭矩 (Rated Torque)	Nm	20
减速比(Ratio)		60 : 1

- 外形图 (Outside Drawing)

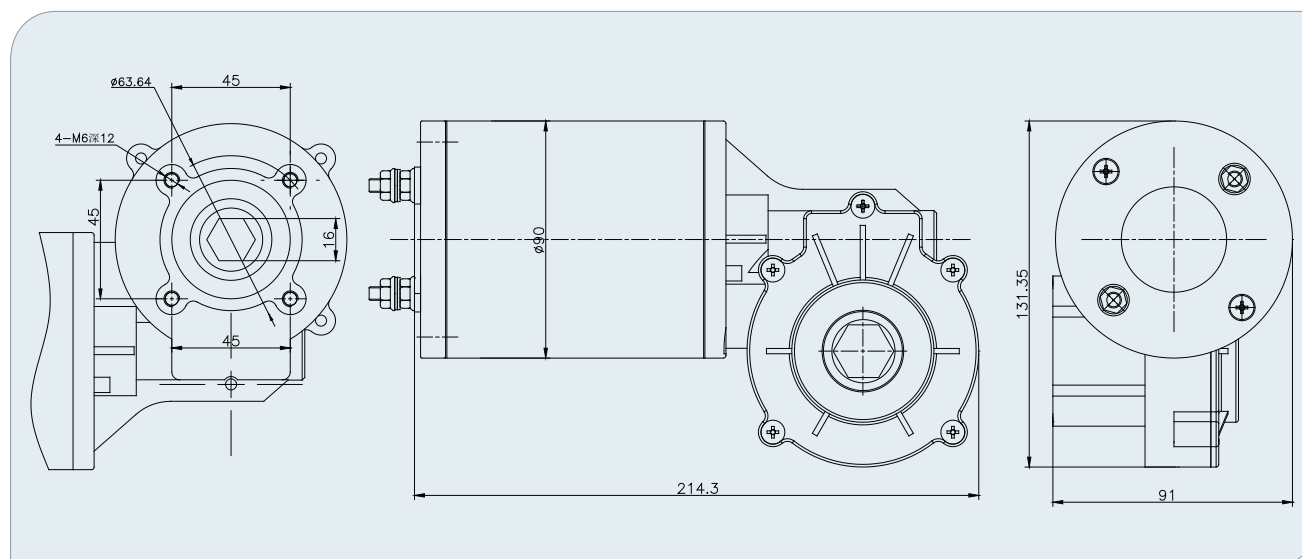

MB100FD

直流减速电机

● 产品应用 (Product Application)


- 撒肥机, 播种机, 育(抛)秧机等
(Fertilizer Spreader, Planter, Seedling Machine etc.)



● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位 (Unit)	MB100FD
工作电压 (Voltage)	VDC	24
功率 (Power)	W	250
空载转速 (No-Load Speed)	RPM	370
空载电流 (No-Load Current)	A	<2
额定转速 (Rated Speed)	RPM	320
额定电流 (Rated Current)	A	13.5
额定扭矩 (Rated Torque)	Nm	6
减速比 (Ratio)		7.1 : 1

● 外形图 (Outside Drawing)

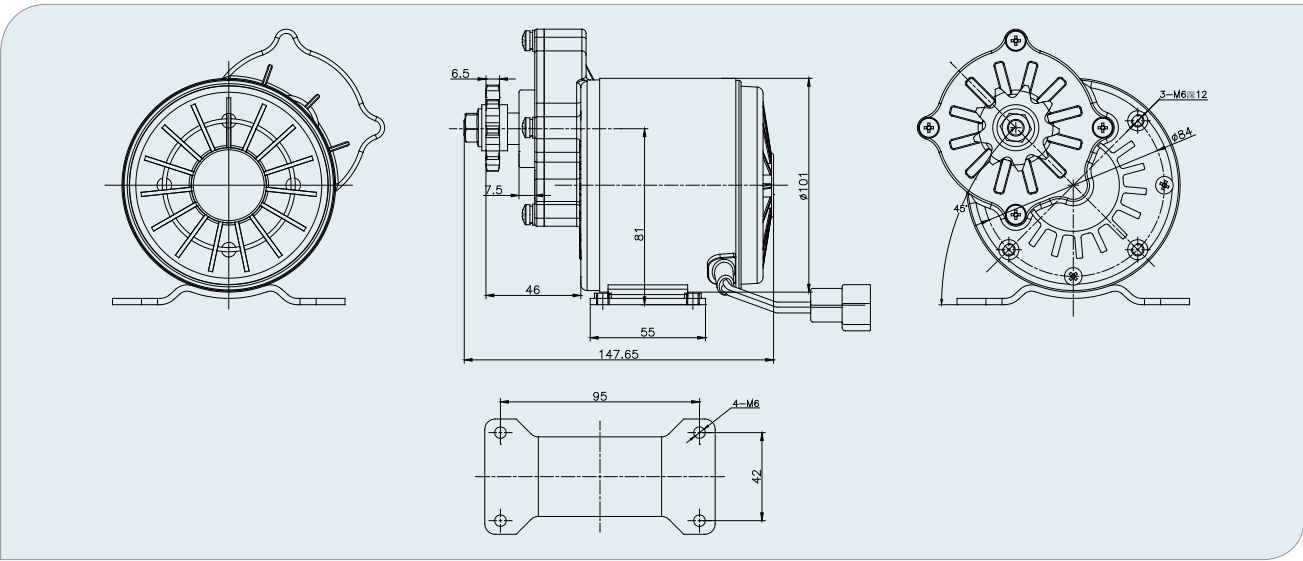


MB100FG

直流减速电机

● 产品应用 (Product Application)

- 撒肥机, 播种机, 育(抛)秧机等
(Fertilizer Spreader, Planter, Seedling Machine etc.)

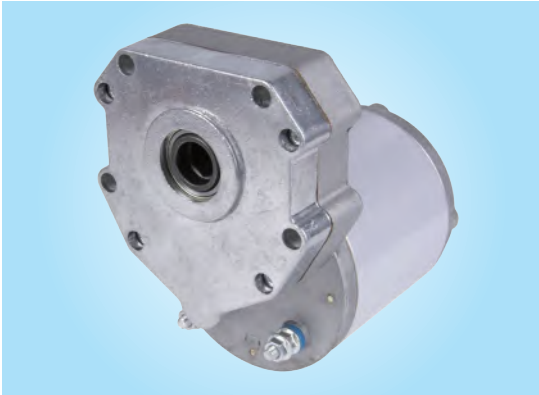

● 性能参数 (Performance Parameter)

规格参数 (Specification)	单位 (Unit)	MB100FG-WE0054
工作电压 (Voltage)	VDC	12
功率 (Power)	W	250
空载转速 (No-Load Speed)	RPM	60
空载电流 (No-Load Current)	A	<3.5
额定转速 (Rated Speed)	RPM	50
额定电流 (Rated Current)	A	28
额定扭矩 (Rated Torque)	Nm	40
减速比 (Ratio)		54 : 1

● 外形图 (Outside Drawing)

